

Specifications

Current rating:3A AC,DC

Voltage rating:250V AC,DC

Temperature range:-25°C~+85°C

Contact resistance:30mΩMax.

Insulation resistance:1000MΩMin.

Withstanding voltage:1000V AC/minute

Compliant with RoHS and REACH

Meet the HF/Halogen Free need to customize

Contact HDGC for details




HDGC2017 Series 2.00mm (.079") Pitch LED Light Bar Connector

HDGC2017-T

2.00mm pitch Crimp Terminal

Reference Informations:

*Used in HDGC2017H-2P series Housing

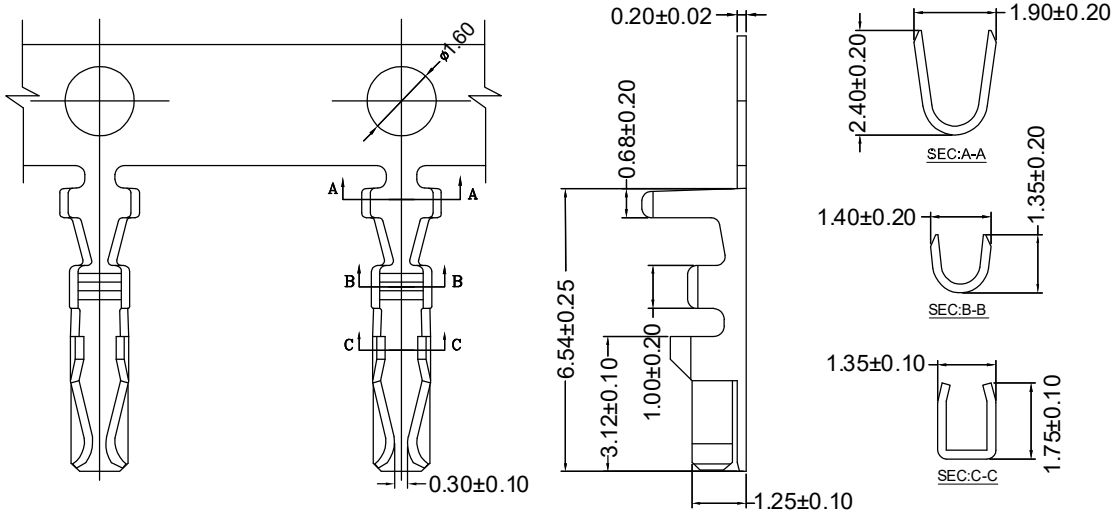

Ordering information & Specifications:

Unit:mm

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC2017-TP	AWG#22-#30	1.45mm(max)	Phosphor Bronze	Tin over Nickel	12,000 PCS
HDGC2017-GP	AWG#22-#30	1.45mm(max)	Phosphor Bronze	Gold over Nickel	12,000 PCS

Optional Gold plating available but MOQ requested

HDGC2017H-2P






2.00mm pitch Housing

Reference Informations:

*Material:Nylon 66,UL94V-0

*Suitable HDGC2017-T series Terminal

*Color:Natural(white)

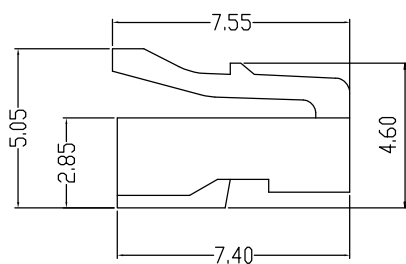

SECTION A-A

Ordering Information:

HDGC2017H-2P - ***
1 2

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

Unit: mm